


FT-SS型 不鏽鋼電纜固定頭

一般環境用

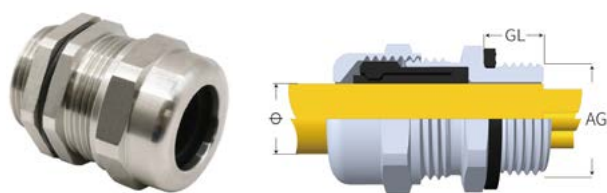

產品說明

材質說明 金屬部分為不鏽鋼304(可訂製316材質)，夾緊爪為尼龍PA66，密封圈為NBR橡膠

防護等級 在規定電纜範圍內，使用密封圈旋轉迫緊固定頭，達IP68

適用溫度 靜態：-40°C到+110°C，瞬間溫度+120°C
動態：-20°C到+80°C，短時間達+100°C

M牙 規格表 (不鏽鋼)

型號	螺紋規格	電纜範圍 Ø	外徑 AG	牙長 GL	板手直徑
FT3-M6-SS	M6x1.0	1.5-3	6	6	10
FT4-M8-SS	M8x1.25(1.0)	2-4	8	6	12
FT6-M10-SS	M10x1.0(1.5)	3-6.3	10	6	14
FT5-M12-SS	M12x1.5	3-5.3	12	9	17
FT6S-M12-SS	M12x1.5	3-6.3	12	9	14
FT8-M12-SS	M12x1.5	4.5-7.8	12	9	17
FT8-M14-SS	M14x1.5	4.5-7.8	14	9	17
FT6-M16-SS	M16x1.5	4-7	16	9	20
FT8S-M16-SS	M16x1.5	4.5-7.8	16	9	19/17
FT10-M16-SS	M16x1.5	6-10	16	9	20
FT9S-M20-SS	M20x1.5	5.5-9	20	10	24
FT10X-M20-SS	M20x1.5	6-10	20	10	24
FT10S-M20-SS	M20x1.5	7-9.8	20	10	24
FT12S-M20-SS	M20x1.5	8-12	20	10	24
FT14-M20-SS	M20x1.5	10-14	20	12	26
FT16-M20-SS	M20x1.5	12-16	20	12	26/27
FT10-M25-SS	M25x1.5	7-11.5	25	12.5	26/31
FT14-M25-SS	M25x1.5	10-14	25	12.5	26/31
FT16-M25-SS	M25x1.5	12-16	25	12.5	30/31
FT18-M25-SS	M25x1.5	14-18	25	12.5	30/31
FT18-M30-SS	M30x1.5(2.0)	14-18	30	12.5	34/31
FT18-M32-SS	M32x1.5	14-18	32	12.5	30/40
FT22-M32-SS	M32x1.5	17-22	32	12.5	38/40
FT25-M32-SS	M32x1.5	18-25	32	12.5	38/40
FT25-M36-SS	M36x1.5(2.0)	18-25	36	14.5	40
FT25-M40-SS	M40x1.5	21-25	40	15	50
FT30-M40-SS	M40x1.5	24-30	40	15	50
FT30-M42-SS	M42x2.0	24-30	42	15	50
FT30-M48-SS	M48x2.0	24-30	48	15	54/50
FT32-M50-SS	M50x1.5	26-32	50	15	60
FT41-M50-SS	M50x1.5	31-41	50	15	60
FT44-M60-SS	M60x2.0	36-44	60	15	70/65
FT44-M63-SS	M63x1.5	36-44	63	15	70/65
FT46-M63-SS	M63x1.5	40-46	63	15	70/65
FT54-M63-SS	M63x1.5	47-53.5	63	15	75/70
FT44-M64-SS	M64x2.0	36-44	64	15	70/65
FT54-M64-SS	M64x2.0	46-54	63	15	76/70
FT54-M72-SS	M72x2.0	47-53.5	72	15	80/75
FT60-M72-SS	M72x2.0	50-60	72	15	80/75
FT66-M75-SS	M75x2.0	56-66	75	15	90
FT60-M80-SS	M80x2.0	50-60	80	15	90/76
FT66-M80-SS	M80x2.0	56-66	80	15	90
FT77-M90-SS	M90x2.0	66-77	90	15	100
FT80-M100-SS	M100x2.0	75-80	100	20	100

NPT牙 規格表 (不鏽鋼)

型號	螺紋規格	電纜範圍 Ø	外徑 AG	牙長 GL	板手直徑
FT5-NPT3/8-SS	NPT3/8	3-5.3	17.05	9	17
FT8-NPT3/8-SS	NPT3/8	4-8	17.05	9	17
FT6-NPT3/8-SS	NPT3/8	3-6.3	17.05	9	20
FT10-NPT3/8-SS	NPT3/8	6-10	17.05	9	20
FT9-NPT1/2-SS	NPT1/2	5.5-9	21.22	11	24
FT12-NPT1/2-SS	NPT1/2	8.5-12	21.22	11	24
FT14-NPT3/4-SS	NPT3/4	10-14	26.56	12	24
FT16-NPT3/4-SS	NPT3/4	12-16	26.56	13	30/31
FT18-NPT3/4-SS	NPT3/4	14-18	26.56	13	30/31
FT22-NPT1-SS	NPT1	18-22	33.23	15	38/40
FT25-NPT1-SS	NPT1	20-25	33.23	15	38/40
FT25-NPT1-1/4-SS	NPT1-1/4	18-25	41.98	15	50
FT30-NPT1-1/4-SS	NPT1-1/4	24-30	41.98	15	50
FT25-NPT1-1/2-SS	NPT1-1/2	18-25	48.05	15	54/50
FT30-NPT1-1/2-SS	NPT1-1/2	24-30	48.05	15	54/50
FT44-NPT2-SS	NPT2	38-44	60.09	15	70/65

PG牙 規格表 (不鏽鋼)

型號	螺紋規格	電纜範圍 Ø	外徑 AG	牙長 GL	板手直徑
FT6S-PG7-SS	PG7	3-6.3	12.5	8	14
FT5-PG7-SS	PG7	3-5.3	12.5	9	17
FT8-PG7-SS	PG7	4.5-7.8	12.5	9	17
FT5-PG9-SS	PG9	3-5.3	15.2	9	17
FT8-PG9-SS	PG9	4.5-7.8	15.2	9	17
FT6-PG11-SS	PG11	4-7	18.6	9	20
FT10-PG11-SS	PG11	6-10	18.6	9	20
FT9-PG13.5-SS	PG13.5	5.5-9	20.4	10	24
FT10-PG13.5-SS	PG13.5	7-11.3	20.4	10	24
FT12-PG13.5-SS	PG13.5	8-12	20.4	10	24
FT10-PG16-SS	PG16	7-11.3	22.5	12	26
FT14-PG16-SS	PG16	9-14	22.5	12	26
FT16-PG21-SS	PG21	12-16	28.3	12.5	32/31
FT18-PG21-SS	PG21	14-18	28.3	12.5	32/31
FT22-PG29-SS	PG29	16-22	37	12.5	42/40
FT25-PG29-SS	PG29	18-25	37	12.5	42/40
FT25-PG36-SS	PG36	18-25	47	15	54/50
FT30-PG36-SS	PG36	24-30	47	15	54/50
FT32-PG42-SS	PG42	26-32	54	15	60
FT41-PG42-SS	PG42	31-41	54	15	60
FT44-PG48-SS	PG48	38-44	59.3	15	70/65
FT51-PG48-SS	PG48	47-53.5	59.3	15	76/70

G/PF牙 規格表 (不鏽鋼)

型號	螺紋規格	電纜範圍 Ø	外徑 AG	牙長 GL	板手直徑
FT6-G1/4-SS	G1/4	3-6.3	13.15	9	17
FT8-G1/4-SS	G1/4	4-8	13.15	9	17
FT5-G3/8-SS	G3/8	3-5.3	16.66	9	20/17
FT8-G3/8-SS	G3/8	4-8	16.66	9	20/17
FT10-G3/8-SS	G3/8	6-10	16.66	9	20
FT9-G1/2-SS	G1/2	5.5-9	20.99	10	24
FT10-G1/2-SS	G1/2	7-11.3	20.99	10	24
FT12-G1/2-SS	G1/2	8.5-12	20.99	10	24
FT14-G1/2-SS	G1/2	10-14	20.99	12	26
FT14-G3/4-SS	G3/4	10-14	26.44	12.5	26/30
FT16-G3/4-SS	G3/4	12-16	26.44	12.5	30/31
FT18-G3/4-SS	G3/4	14-18	26.44	12.5	30/31
FT25-G1-SS	G1	20-25	33.25	14.5	38/40
FT22-G1-SS	G1	15-22	33.25	14.5	38/40
FT25-G1-1/4-SS	G1-1/4	18-25	41.91	15	50
FT30-G1-1/4-SS	G1-1/4	24-30	41.91	15	50
FT25-G1-1/2-SS	G1-1/2	18-25	47.8	15	54/50
FT30-G1-1/2-SS	G1-1/2	24-30	47.8	15	54/50
FT44-G2-SS	G2	38-44	59.61	15	70/65
FT66-G2-1/2-SS	G2-1/2	56-66	75.18	15	90/85