




MM-EX-A2F 防爆電纜固定頭

非鎧裝單封用

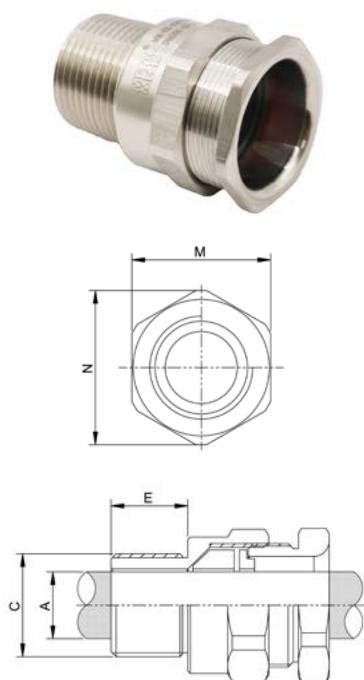

產品說明

材質說明

黃銅鍍鎳、316L不鏽鋼(可訂製304不鏽鋼)

電纜類型 非鎧裝電纜用

防護等級 IP66/IP68

防爆保護

db、eb 和 tb Ex db IIC Gb、
Ex eb IIC Gb、Ex tb IIIC Db

證書編號

IECEx PRE 20.0124X

Presafe 20 ATEX 48906X

TS證書號 TD13002X

MM-EX-A2F 規格表

型號	適用入口螺紋C			螺紋長度E		電纜外徑A		板手徑M	六角對邊N
	標準	可選		M牙	NPT牙	最小值	最大值	最大值	最大值
MM-EX-A2F-20S16	M20	1/2"	3/4"	17	20	3.2	8.5	24	26.5
MM-EX-A2F-20S	M20	1/2"	3/4"	17	20	6.2	11.6	24	26.5
MM-EX-A2F-20	M20	1/2"	3/4"	17	20	8	13.9	27	30
MM-EX-A2F-25	M25	3/4"	1"	17	21	11.2	19.6	36	40
MM-EX-A2F-32	M32	1"	1-1/4"	17	26	17.1	26	42	46
MM-EX-A2F-40	M40	1-1/4"	1-1/2"	17	26	23.6	31.6	50	55
MM-EX-A2F-50S	M50	1-1/2"	2"	17	26	31.1	37.5	55	60
MM-EX-A2F-50L	M50	2"	2-1/2"	17	27	35.7	43.1	61	65
MM-EX-A2F-63S	M63	2"	2-1/2"	17	27	41.6	48.7	70	77
MM-EX-A2F-63L	M63	2-1/2"	3"	17	40	47.3	55.2	74	81
MM-EX-A2F-75S	M75	2-1/2"	3"	17	40	54.1	61.2	80	87
MM-EX-A2F-75L	M75	3"	3-1/2"	17	42	61.2	67.2	91	93
MM-EX-A2F-90	M90	3-1/2"	4"	24	44	66.7	79.2	108	116

MM-EX-A2F 訂購說明

訂購範例

MM-EX-A2F **20S1M** **X4**

代號 材質

螺紋規格

品名	代號	螺紋規格 M牙	螺紋規格 NPT牙	螺紋規格 可選NPT	材質
MM-EX-A2F	20S16	1M = M20	1N = 1/2"	2N = 3/4"	B1 = 黃銅
	20S	1M = M20	1N = 1/2"	2N = 3/4"	B2 = 黃銅鍍鎳
	20	1M = M20	1N = 1/2"	2N = 3/4"	B3 = 無電鍍鍍鎳
	25	2M = M25	2N = 3/4"	3N = 1"	X4 = 304不鏽鋼
	32	3M = M32	3N = 1"	4N = 1-1/4"	X6 = 316L不鏽鋼
	40	4M = M40	4N = 1-1/4"	5N = 1-1/2"	
	50S	5M = M50	5N = 1-1/2"	6N = 2"	
	50	5M = M50	5N = 2"	6N = 2-1/2"	
	63S	6M = M63	6N = 2"	7N = 2-1/2"	
	63	6M = M63	6N = 2-1/2"	7N = 3"	
	75S	7M = M75	7N = 2-1/2"	8N = 3"	
	75	7M = M75	8N = 3"	9N = 3-1/2"	
	90	8M = M90	9N = 3-1/2"		